



**STANDARD
PRESSURE**


IDEAL FOR USE WITH
**AUTO NOZZLE
METER**

» GPI EXCLUSIVE!
Factory-Installed
Power Cord: Reduced
Installation Time

GPI > Fuel Transfer Pump
M-240
Series

**15
GPM**
57 L/min

**24V
DC**
Mobile

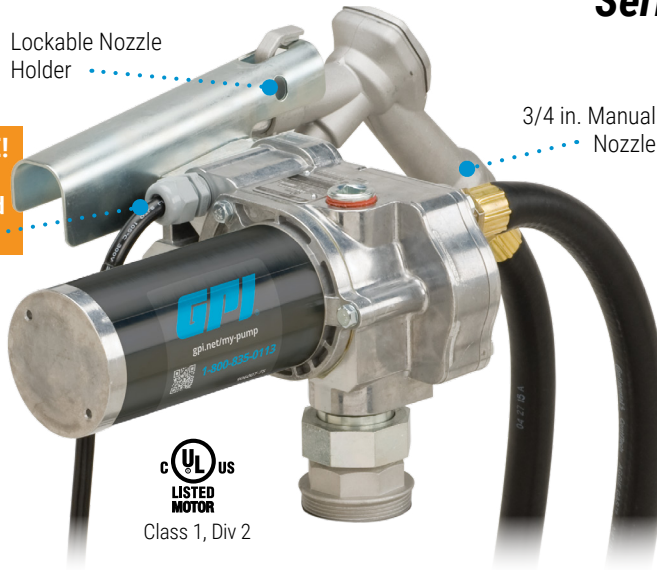

UL US
LISTED
MOTOR
Class 1, Div 2



ELECTRICAL

Input:	24V (dc)
Type:	Rotary Gear
Current Draw:	9 amp
Motor:	1900 RPM, 1/5 HP, UL Listed to US and Canadian Standards

PERFORMANCE

Flow Rate:	15 GPM (57 L/min)
Duty Cycle:	30 min. ON, 30 min. OFF

OPERATING PRESSURE

15 psi (1.03 bar) - Standard Pressure

OPERATING TEMPERATURE

-20°F to 125°F (-29°C to 52°C)

PUMP HOUSING

Corrosion-Resistant Diecast Aluminum

MECHANICAL CONNECTIONS

Inlet / Outlet:	1 in. NPT / 3/4 in. NPT
Mounting:	2 in. NPT

DISPENSING HOSE

12 ft. (3.7 m) x 3/4 in.

SUCTION PIPE

Telescoping 15 to 40 in.
(38.1 to 101.6 cm)

POWER CORD

18 ft. (5.5 m), 12/2 AWG

WARRANTY

2 Year Pump



The M-240S series is the 24-volt pump of choice for agricultural, automotive and construction applications.

- Designed for use with a 24-volt power source

> Ordering Information

Part No.	Model	Nozzle	Hose	Power Cord	Mount	Suction Pipe	Nozzle Holder
110000-70	M-240S-MU	Manual	12 ft.	Installed	Spin Collar	Included	Lockable
110000-71	M-240S-PO	None	None	Included*	Spin Collar	None	Lockable

*Customer installation required