




> Fluid Transfer Hand Pump

HP-100

Lever action piston pump with lockable handle

For use with: diesel fuel, gasoline (UL model only), kerosene, medium oil (up to 30W) and hydraulic fluid

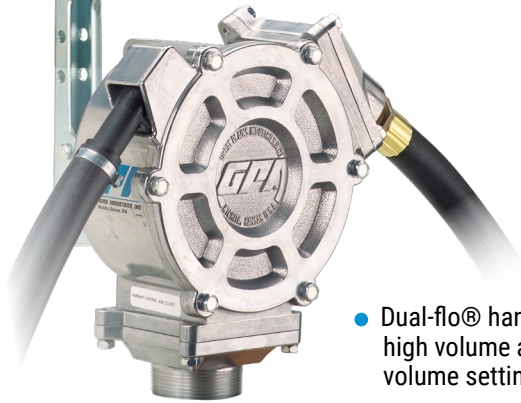

- Dual-flo® handle provides high volume and low volume settings
- Pumps fluid on both the push and pull strokes for fast delivery
- Built-in anti-siphon valve



a HP-100



b HP-100-UL

> Ordering Information

Part No.	Model	Certifications	Compatible Fluids
114000-5	HP-100	None	D K O PF
114000-10	HP-100-UL	UL LISTED Pump	D G K O PF

Up to
50
gallons
per 100 strokes
189 litres
per 100 strokes



HAND PUMPS

SPECIFICATIONS

Type: Piston Hand Pump

PERFORMANCE

Flow Rate: Up to 50 Gallons per 100 Stroke Cycles (Up to 189 Litres per 100 Strokes Cycles)

HOUSING MATERIAL

Corrosion-Resistant Aluminum

NOZZLE MATERIAL

Thermoplastic or Metal

MECHANICAL CONNECTIONS

Inlet: 1 in. NPT

Outlet: 3/4 in. NPT

Mounting: 2 in. NPT

DISPENSING HOSE

8 ft. (2.44 m) x 3/4 in.

SUCTION PIPE

Telescoping 15 to 40 in. (38.1 to 101.6 cm)

WARRANTY

2 Year Pump



> **Fluid Transfer
Hand Pump**

Up to **20**
gallons
per 100 strokes
76 litres
per 100 strokes

DP-20

Lever action diaphragm pump
with lockable handle



- GPI's fluid transfer solution for **dirty or contaminated fluids**



For use with: gasoline, diesel fuel, kerosene, medium oil (up to 30W) and hydraulic fluid

SPECIFICATIONS

Type: Diaphragm

PERFORMANCE

Flow Rate: Up to 20 Gallons per 100 Stroke Cycles (Up to 76 Litres per 100 Strokes Cycles)

HOUSING MATERIAL

Corrosion-Resistant Aluminum

NOZZLE MATERIAL

Thermoplastic Spout, with Built-In Holder



> **Ordering Information**

Part No.	Model	Certifications
138000-01	DP-20	None
138000-02	DP-20-UL	Pump



> **Fluid Transfer
Hand Pump**

Up to **10**
gallons per
100 revolutions
38 litres
per 100 revolutions

RP-10

Rotary action pump
with lockable handle



- Built-in anti-siphon valve



For use with: gasoline, diesel fuel, kerosene, medium oil (up to 30W) and hydraulic fluid

SPECIFICATIONS

Type: Rotary

PERFORMANCE

Flow Rate: Up to 10 Gallons per 100 Revolutions (Up to 38 Litres per 100 Rev.)

HOUSING MATERIAL

Corrosion-Resistant Aluminum

SPOUT MATERIAL

Metal Spout, with Built-In Holder

MECHANICAL CONNECTIONS

Inlet: 1 in. NPT

Outlet: 3/4 in. NPT

Mounting: 2 in. NPT

SUCTION PIPE

Telescoping 15 to 40 in. (38.1 to 101.6 cm)

WARRANTY

2 Year Pump



> **Ordering Information**

Part No.	Model	Certifications
123000-06	RP-10-UL	




> Fluid Transfer
Hand Pump

Up to **8**
gallons per
100 revolutions
30 litres per
100 revolutions

RP-5

Rotary action pump



For use with: Petroleum based fluids having a flash point above 100° F (38° C). Diesel fuel and kerosene. Light oil (up to 10W) and hydraulic fluid. **Do not use with gasoline.**

SPECIFICATIONS

Type: Rotary

PERFORMANCE

Flow Rate: Up to 8 Gallons (30 Litres) per 90 Revolutions

HOUSING MATERIAL

Cast Iron

SPOUT MATERIAL

Metal

MECHANICAL CONNECTIONS


Mounting: 2 in. NPT

SUCTION PIPE

Three Piece, Metal, 13 to 40 in. (33.02 to 101.6 cm)

WARRANTY

90 Days



> **Ordering Information**

Part No.	Model
129003-1	RP-5



> Fluid Transfer
Hand Pump

Up to **1** pint
per stroke
0.5 litres
per stroke

LP-50

Lever action pump



- Works with drums up to 36 in.



For use with: Water, Antifreeze, Petroleum Based Products, Mild Detergents, Lubricants and most Ag Chemicals. **Not for use with kerosene, Diesel Fuel, Roundup® Concentrate or Flammable Fluids.**

SPECIFICATIONS

Type: Piston

PERFORMANCE

Flow Rate: Up to 1 Pint (0.5 litres) per Stroke

HOUSING MATERIAL

Polypropylene

MECHANICAL CONNECTIONS

Inlet / Outlet: 3/4 in. NPT / Hose Barb for 1 in. Hose

Mounting: 2 in. NPT

SUCTION PIPE

Polypropylene, Telescoping to 36 in. (91.44 cm)

WARRANTY

90 Days



Part No.	Model
129000-1	LP-50



> Fluid Transfer
Hand Pump

Up to **1** pint
per stroke
0.5 litres
per stroke

BP-12

Lever action pump



- Convenient lever handle on a barrel pump



For use with: Lightweight petroleum products, oils, anti-freeze and kerosene

SPECIFICATIONS

Type: Piston

PERFORMANCE

Flow Rate: Up to 1 Pint (0.5 Litres) per Stroke

BARREL MATERIAL

Steel

SPOUT MATERIAL

Plastic (Detachable)

CONNECTIONS

Mounting: 2 in. NPT

SUCTION PIPE


Plastic, Adjustable 19 to 35 in. (48.26 to 88.90 cm)

WARRANTY

90 Days

> **Ordering Information**


Part No.	Model
129010-1	BP-12

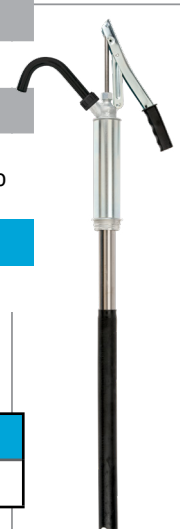



HAND PUMPS

ACCESSORIES AND SPARE PARTS

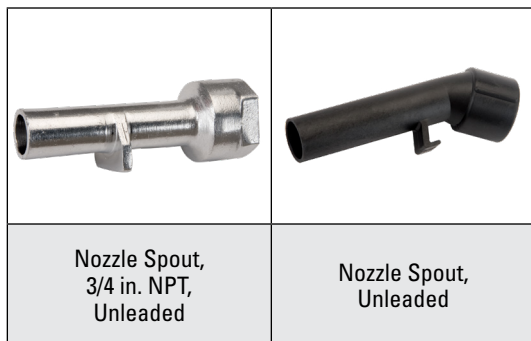

Nozzle Spout,
3/4 in. NPT,
Unleaded

Nozzle Spout,
Unleaded


Model/Part#	114047-501	138123-01
HP-100-UL	X	
RP-10	X	
DP-20		X

HOSES

3/4 in. NPT x 8 ft. (2.4 m) hose and nozzle spout assembly kit, POP

3/4 in. NPT x 8 ft. (2.4 m) fuel hose, UL

Model/Part#	114504-503	114045-501
HP-100	X	
HP-100-UL		X
RP-10		X
DP-20		X

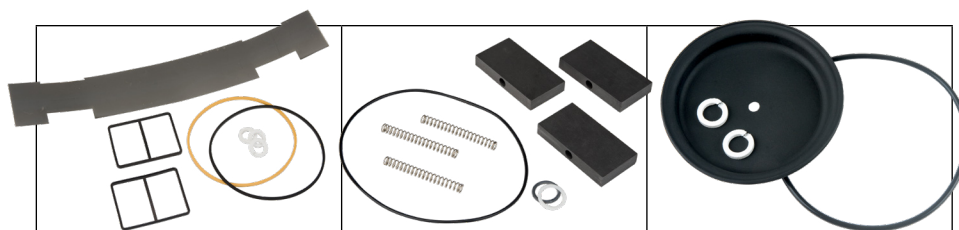

Overhaul Kit for HP-100:
Piston ring, three seals,
packing seals and liner

Overhaul Kit for RP-10:
Vanes springs, o-rings
and gasket

Diaphragm and Seal Kit
for DP-20

Model/Part#	114505-2	123503-1	138501-01
HP-100	X		
RP-10		X	
DP-20			X



Composite suction pipe,
1 in. NPT, adjusts from 15 to 40 in.
(38.1 to 101.6 cm)

Composite suction
pipe extension, adds
14.5 in. (36.8 cm)

Model/Part#	110241-01	110241-02
HP-100	X	X
DP-20	X	X
RP-10	X	X