



NORMAL PRESSURE

IDEAL FOR USE WITH
MANUAL NOZZLE



> Fuel Transfer Pump

G8P

8 GPM


30 L/min

12V DC

Portable

» GPI EXCLUSIVE!

Factory-Installed Power Cord:
Reduced Installation Time

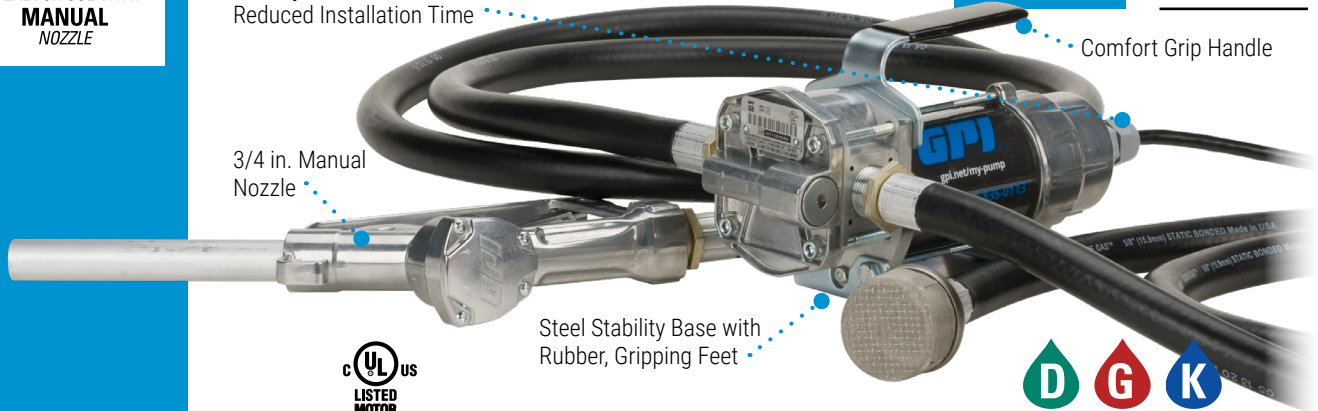

3/4 in. Manual Nozzle

Comfort Grip Handle

Steel Stability Base with Rubber, Gripping Feet



Class 1, Div 2



Connect the G8P to a DC power source and fuel virtually any petroleum-powered vehicle or equipment, anywhere.

- Gas station equivalent flow rate
- Extremely lightweight and portable
- Self-priming
- Low-maintenance

> **Ordering Information**

Part No.	Model
147000-01	G8P-012-MU

ELECTRICAL

Input:	12V (dc)
Type:	Rotary Gear
Current Draw:	15 amp
Motor:	1100 RPM, 1/10 HP, UL Listed to US and Canadian Standards

PERFORMANCE

Flow Rate:	8 GPM (30 L/min)
Duty Cycle:	15 min. ON, 30 min. OFF

OPERATING PRESSURE

10 psi (0.69 bar) - Normal Pressure

OPERATING TEMPERATURE

-20°F to 125°F (-29°C to 52°C)

PUMP HOUSING

Corrosion-Resistant Diecast Aluminum

MECHANICAL CONNECTIONS

Inlet:	3/4 in. NPT
Outlet:	3/4 in. NPT

DISPENSING HOSE

8 ft. (2.44 m) x 5/8 in.

SUCTION HOSE

8 ft. (2.44 m) x 5/8 in. with strainer

POWER CORD

12 ft. (3.6 m), 14/2 AWG

WARRANTY

2 Year Pump