

12V  
DC

Mobile

8  
GPM

30 L/min



> Fuel Transfer Pump


EZ8



IDEAL FOR USE WITH  
**MANUAL  
NOZZLE**

» GPI EXCLUSIVE!

Factory-Installed  
Power Cord: Reduced  
Installation Time

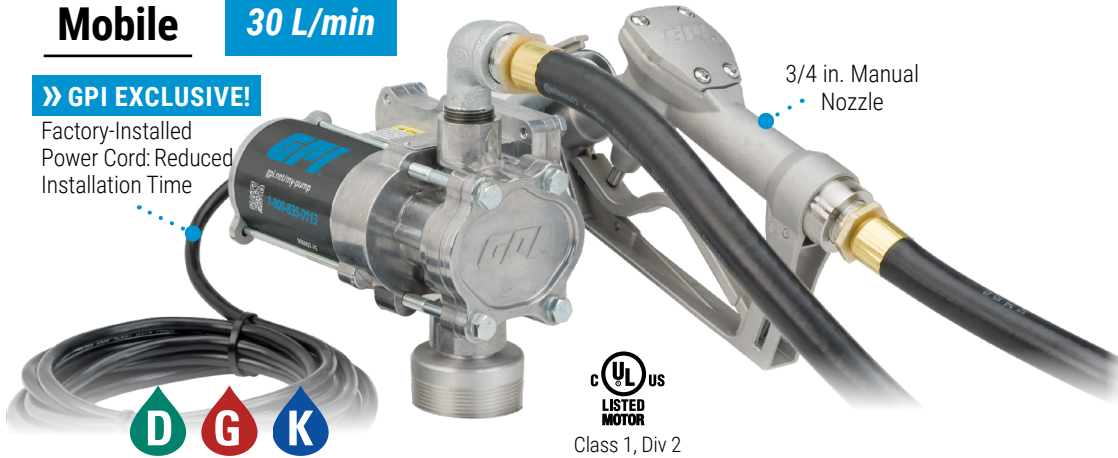

ELECTRICAL

Input:	12V (dc)
Type:	Rotary Gear
Current Draw:	11 amp
Motor:	2100 RPM, 1/10 HP, UL Listed to US and Canadian Standards

PERFORMANCE

Flow Rate:	8 GPM (30 L/min)
Duty Cycle:	15 min. ON, 30 min. OFF

OPERATING PRESSURE

15 psi (1.03 bar) - Normal Pressure

OPERATING TEMPERATURE

-20°F to 125°F (-29°C to 52°C)

PUMP HOUSING

Corrosion-Resistant Diecast Aluminum

MECHANICAL CONNECTIONS

Inlet / Outlet:	1 in. NPT / 3/4 in. NPT
Mounting:	2 in. NPT

DISPENSING HOSE

10 ft. (3.0 m) x 5/8 in.

SUCTION PIPE

Telescoping 15 to 40 in.  
(38.1 to 101.6 cm)

POWER CORD

15 ft. (4.6 m), 14/2 AWG

WARRANTY

2 Year Pump



Fuel your next adventure with our compact EZ-8. Mount this dependable pump to fuel drums or tanks up to 100 gallons and you're ready to go off-roading, cruise the lake, or achieve "yard of the week" mowing status.

- Gas station equivalent flow rate
- Self-priming, low maintenance design
- Thermal overload protection

> Ordering Information

Part No.	Model
<b>a</b> 137100-01	EZ-8
<b>b</b> 137100-05	EZ-8 w/Spin Collar



**a** EZ-8



**b** EZ-8 w/Spin Collar