



STANDARD PRESSURE

IDEAL FOR USE WITH
AUTO NOZZLE
METER



> Fuel Transfer Pump

M-150

Series


15 GPM

57 L/min

12V DC

Mobile

» GPI EXCLUSIVE!
Factory-Installed
Power Cord: Reduced
Installation Time

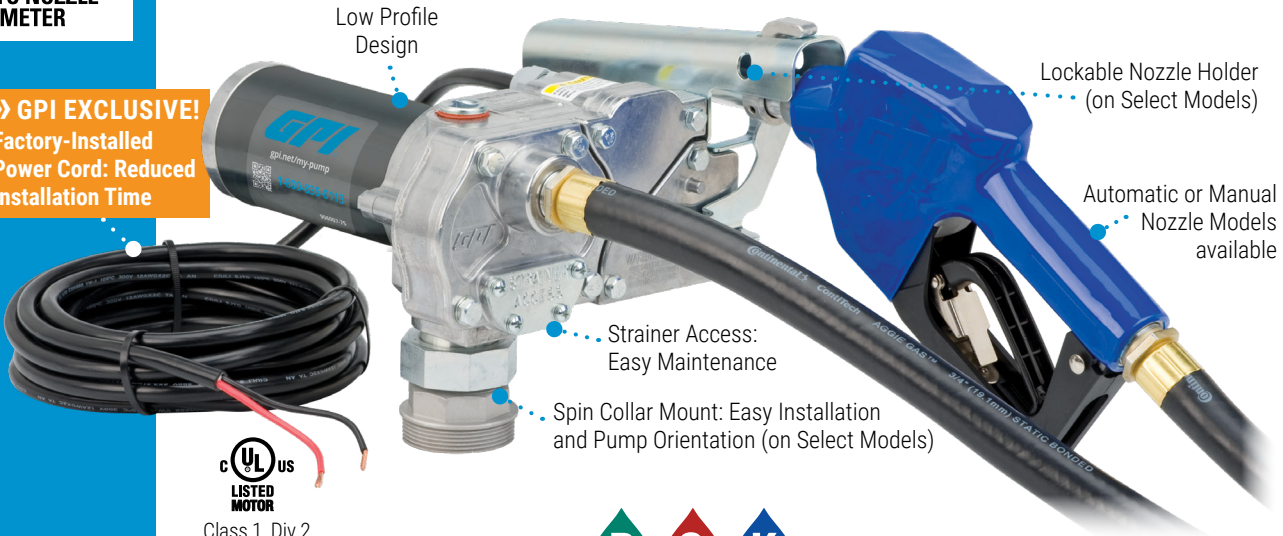

Low Profile Design

Lockable Nozzle Holder
(on Select Models)

Automatic or Manual
Nozzle Models
available

Strainer Access:
Easy Maintenance

Spin Collar Mount: Easy Installation
and Pump Orientation (on Select Models)



Class 1, Div 2
PO = Class 1, Div 1



- 15 GPM flow rate, empties 100 gallon mobile tanks in approximately 7 minutes
- Extremely long life and trouble-free operation
- Circuit breaker motor protection

Whether you're harvesting crops, gearing up for your next race, or refueling your fleet of mowers, our M-150 provides reliable flowrates with minimal downtime. Mount this easy-to-install workhorse to mobile tanks and fuel your passion.

ELECTRICAL

Input: 12V (dc)

Type: Rotary Gear

Current Draw: 18 amp

Motor: 1900 RPM, 1/5 HP,
UL Listed to US and
Canadian Standards

PERFORMANCE

Flow Rate: 15 GPM (57 L/min)

Duty Cycle: 30 min. ON,
30 min. OFF

OPERATING PRESSURE

15 psi (1.03 bar) - Standard Pressure

OPERATING TEMPERATURE

-20°F to 125°F (-29°C to 52°C)

PUMP HOUSING

Corrosion-Resistant Diecast Aluminum

MECHANICAL CONNECTIONS

Inlet / Outlet: 1 in. NPT / 3/4 in. NPT

Mounting: 2 in. NPT

DISPENSING HOSE

12 ft. (3.7 m) x 3/4 in. or
10 ft. (3 m) x 3/4 in.

SUCTION PIPE

Telescoping 15 to 40 in.
(38.1 to 101.6 cm)

POWER CORD

18 ft. (5.5 m), 12/2 AWG

WARRANTY

2 Year Pump

> **Compatible Fluids**

Designed, tested and approved for use with gasoline blends (up to E15), diesel fuel blends (up to B20) and kerosene.

> **Pump Only Models**

Additional compatible fluids: pump only models also support the use of aviation gasoline (AVGAS100LL) and kerosene grade (JET A).



a M-150S-AU



b M-150S-MU



c M-150S-EM

> Ordering Information

	Part No.	Model	Nozzle	Hose	Power Cord	Mount	Suction Pipe	Nozzle Holder
a	110000-100	M-150S-AU	Automatic	12 ft.	Installed	Spin Collar	Included	Lockable
b	110000-99	M-150S-MU	Manual	12 ft.	Installed	Spin Collar	Included	Lockable
c	110000-107	M-150S-EM	Manual	10 ft.	Installed	Direct Mount	Included	Standard
d	110000-103	M-150S-PO	None	None	Included*	Spin Collar	None	Lockable
e	110240-02	M-150S-E-PO	None	None	None	Direct Mount	None	Standard



d M-150S-PO



e M-150S-E-PO

*Customer installation required

M-150 PUMP AND M30 METER COMBO KITS:

Part No.	Model	Meter Units	Nozzle	Hose
110610-18	M-150S-AU/M30-G6N	Gallon	Automatic	12 ft.
110610-17	M-150S-MU/M30-G6N	Gallon	Manual	12 ft.
110610-20	M-150S-AU/M30-L6N	Litres	Automatic	12 ft.