


# Spiraflex® Cable Guard

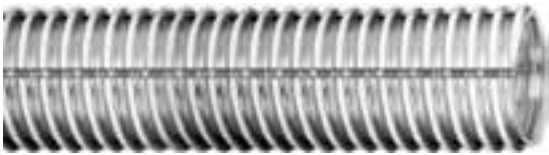

## Product Specifications

### Application

This hose is for use as a protective cover for supply lines. It is flame-resistant and MSHA-approved.

### Construction

#### > Tube

Clear rigid PVC corrugated for flexibility

#### > Reinforcement

White high-density rigid PVC helix corrugated for flexibility, MSHA

### Temperature Range

0°F to 150°F (-18°C to 66°C)

### Packaging

Continuous one-piece, coiled and poly-wrapped, available in 50' or 100' lengths. Available pre-slit longitudinally for easy installation.

### Branding

Example: Cable Guard USMSHA IC-11/12 Made in USA Continental


### Order Codes

586-438

## Spiraflex® Cable Guard

SAP #	ID		Nom. OD		Bend Radius		Weight	
Clear	in.	mm	in.	mm	in.	mm	lb./ft.	kg/m
20013414	1 ½	38.1	1.74	44.2	2	51	0.23	0.34
20013419	2	50.8	2.28	57.9	3	76	0.34	0.51
20013425	3	76.2	3.37	85.6	6	152	0.52	0.77
20013431	4	101.6	4.44	112.8	9	229	0.75	1.12

### Force-to-Bend (lb.)

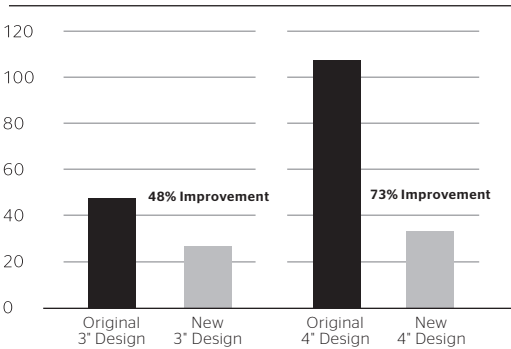

### Force-to-Open (lb.)

